


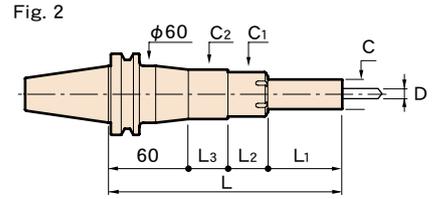


DETa-1 超弹性筒夹刀柄 A 型 (DTA)

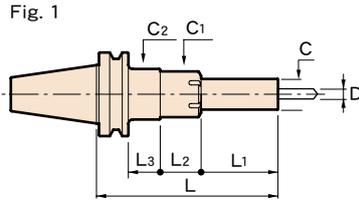

20000 min⁻¹
※BT50/A100/DN50A : 10000 min⁻¹

型号	Fig.	φD	L	φC	L1	L2	L3	φC1	φC2	φD1	kg	G 等级值	(N)				
BT30-DTA 3- 90	1	0.5 ~ 3.175	90	10	27	26	15	22	25	—	0.5	10.1	2.4				
-DTA 7- 90				21	30	37	1	38	42		0.7	20.0	6.7				
-120		120	60	42	3.5	45	45	0.8	20.7		7.9						
-DTA12-120			2.5 ~ 13					30	52.5		2.1	12.1	12.1				
BT40-DTA 3- 95	1	0.5 ~ 3.175	95	10	27	26	15	22	25	—	1.1	7.4	3.9				
-125			125	21	38	37	3	38	60		1.2	7.5	4.3				
-DTA 7-105			1 ~ 7								105	60	11	43	1.3	13.7	8.5
-135											135	41	1.4	14.2	9.5		
-165											165	71	1.7	13.3	10.8		
-195											195	1.5	16.2	11.6			
-DTA12-120		2.5 ~ 13									120	30	52.5	40	0.5	45	58
-150			150	75	8	50	2.1	15.5	15.5								
-180			180	38	2.6	13.8	17.1										
-210			210	68	3.8	4.3	15.5										
BT50-DTA 7-105			1	1 ~ 7	105	21	30	37	—		38	—	3.8	4.3	15.5		
-135					135	60	30	43	3.9		4.5	16.6					
-165	165	120			4.0	4.7			18.0								
-195	195	4.4			4.6	19.5											
-255	255	5.0			3.8	18.2											
-315	315	5.9			3.4	19.1											
-DTA12-135	1	2.5 ~ 13			135	30	52.5	40	4.5	45	50	4.1	5.0	19.4			
-165					165	75	12	4.3	5.3	21.6							
-195					195	42	4.7	5.2	23.4								
-255					255	102	5.5	4.2	22.3								
-315			315	6.6	3.7	23.3											
A63 -DTA 3- 90			3	0.5 ~ 3.175	90	10	27	26	11	22	25	—	0.8	7.9	3.0		
-120	120	41			1.0	7.1	3.4										
-DTA 7-105	1 ~ 7	105		21	30	37	12	38	50	1.1	32.9		17.3				
-120		120		38	19	1.3	29.5	18.3									
-150		150		60	27	1.7	25	20.3									
-DTA12-120		2.5 ~ 13		120	30	52.5	40	1.5	45	1.2	38.2		21.9				
-150	150			75	9	1.4	37.7	25.2									
-180	180			39	1.8	32.2	27.7										

型号	Fig.	φD	L	φC	L ₁	L ₂	L ₃	φC ₁	φC ₂	φD ₁	kg	G 等级值	N					
A100 -DTA 7-135 -165 -225 -DTA12-135 -165 -225	3	1 ~ 7	135	21	30	37	39	38	50	—	2.7	13.1	33.8					
			165		60						2.8			13.3	35.5			
			225		99						3.7			9.5	33.6			
		2.5~13	135	30	52.5	40	13.5	45	2.7	14.4	37.1							
			165		75				2.9			14.6	40.4					
			225		81				3.8			10.9	39.7					
E32 -DTA 3- 75	3	0.5~ 3.175	75	10	27	26	2	22	25	—	0.2	18.8	1.8					
E40 -DTA 3- 75	3	0.5~ 3.175	75	10	27	26	2	22	25	—	0.3	11.9	1.7					
E50 -DTA 3- 80	3	0.5~ 3.175	80	10	27	26	1	22	25	—	0.5	8.8	2.1					
F63 -DTA 3- 90 -120	3	0.5~ 3.175	90	10	27	26	11	22	25	—	0.8	6.0	2.3					
			120				41				27			26	0.9	6.3	2.7	
DN40A -DTA 3- 95 -125	1	0.5~ 3.175	95	10	27	26	10.8	22	25	—	1.1	8.8	4.6					
			125				40.8				1.2			8.7	5.0			
DN40A -DTA 7-105 -135 -DTA12-130 -160	1	1 ~ 7	105	21	30	43.8	12.1	38	45	—	1.2	20.8	11.9					
			135		60		37				18.9			1.3	23.2	14.4		
		2.5~13	130		30	52.5	56.9				—			45	—	1.5	25.1	18.0
			160			75										66.4		
DN50A -DTA 7-135 -165 -195 -DTA12-135 -165 -195	1	1 ~ 7	135	21	60	37	3	38	50	—	3.4	6.2	20.1					
			165				33				43			3.6	5.8	20.0		
			195				63				3.9			5.5	20.6			
		2.5~13	135				30	52.5	40		7.5	45	50	3.6	6.3	21.5		
			165					15						3.8			7.1	25.8
			195					45						4.2			6.6	26.4
ST16 -DTA 3	4	0.5~ 3.175	60	10	27	60	—	22	25	16	—	—	—					
ST20 -DTA 3	4	0.5~ 3.175	60	10	27	60	—	22	—	20	—	—	—					
ST32T -DTA 7- 75 -105 -DTA12-105 -135	4	1 ~ 7	75	21	31.5	100	—	38	—	32	—	—	—					
			105		61.5									45				
		2.5~13	30		52.5			75										
			135		75													
S32 -DTA 7- 75 -DTA12-100	4	1 ~ 7	75	21	31.5	70	—	38	—	32	—	—	—					
		2.5~13	100		30			52.5						45				

■选购品

- DETA-1 超弹性筒夹→P.31
- 扳手→P.31
- 拉钉(BT)→P.77
- 清洁用具→P.31

■标准附属品

- 冷却液导管(HSK-A)→P.119
- 导向拉杆(DTA3)

■备考

- BT30-DTA12-120 根据机器种类的不同,有不能使用 ATC 的可能。

■注意事项

- HSK-E 刀柄不附带冷却液导管。也无法安装冷却液导管。
- 使用上的注意和维护保养请参照 P.130

导向拉杆 (DTA3 用)

本体 (DTA3 型) 安装筒夹时的必需品。本体标准附带一个。

